

STRIP MINI SLIM




STRIP mini Slim is a linear lighting profile that can be recessed, surface mounted (wall or ceiling) or suspended. It consists of an aluminium extruded profile with an integrated gear and opal diffuser. Available in fixed output or DALI/touch dim, up or downlight.

Made-to-measure in multiples of 140mm plus 20mm for tolerance and end caps. Optional with multi optics and/or double POINTER30.








45
36,5








STRIP MINI SLIM LED MODULE

			
length	140 mm	280 mm	560 mm
reference	14L014HW/WW/W	14L028HW/WW/W	14L056HW/WW/W
wattage	3.1 / 4.5 W	6.2 / 9 W	12.4 / 18 W
K HW/WW/W	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K	2700 K/3000 K/4000 K
CRI	95+	95+	95+

STRIP MINI SLIM GEAR


		reference	14F1035	14F1035/ pushdim/dali	14F1060	14F1060DD/ pushdim/dali	14F1010
IP20	CE	wattage	35 W	35 W	60 W	60 W	100 W

STRIP MINI SLIM ACCESSORIES

					
	profile/m	endplate	suspension single	straight junction	90° junction
reference	14100	14101	1.5 m - 14102 3 m - 14103	14104	14105




STRIP MINI SLIM MULTIOPTICS

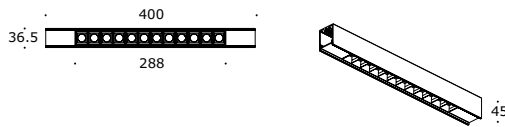

reference	14193HW/WW/W
led wattage	12x1.2 W/15 W
lamp	
optics	42°
K WW/W	3000/4000 K
CRI	90+

STRIP MINI SLIM POINTER 30

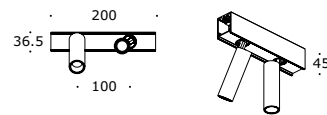

reference	14192HW/WW/W
led wattage	2x7 W
lamp	COB44°
K WW/W	2700/3000/4000 K
CRI	97+

STRIP MINI SLIM GEAR

reference	14F1035	14F1035DD/pushdim/dali
wattage	35 W	35 W

reference	14F1060	14F1060DD/pushdim/dali
wattage	60 W	60 W



reference	14F10100
wattage	100 W

IP20

STRIP MINI SLIM POINTER 30 GEAR

reference	14F10-42
wattage	10-42 W / 1-3 modules



reference	14F10-42DD/ pushdim/dali
wattage	10-42 W / 1-3 modules

IP20