







LELO SURFACE



LELO is available in 3 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination. Integrated or remote control gear that can be fixed or touch/ DALI dimmable. Can be ordered in DOWN or UP/DOWN versions in 900mm, 1200mm or 1500mm diameter.



LELO SURFACE BASE




	900 mm	1200 mm	1500 mm
reference	42110HW/WW/W	42111HW/WW/W	42112HW/WW/W
reference DALI	42110DDHW/WW/W	42111DDHW/WW/W	42112DDHW/WW/W
wattage	58 W	70 W	92 W
voltage	230 V	230 V	230 V
K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
IP20	CRI 95+	95+	95+
	3800 lm	5000 lm	6200 lm

POWER FEED

FEED RECESSED

Strip | Stripmini | Stripminislim | Lelo | Shu




3X 5X

00014

00015

FEED RECESSED TRIMLESS

Strip | Stripmini | Stripminislim | Lelo | Shu

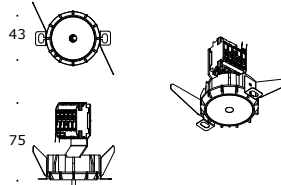


5X

00115


FEED EXTERNAL

Strip | Stripmini | Stripminislim | Lelo | Shu

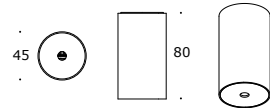

00012

Strip | Stripmini | Stripminislim | Lelo | Shu




3X 5X

00016

00017


FEED COMBI

Strip | Stripmini | Stripminislim | Lelo | Shu

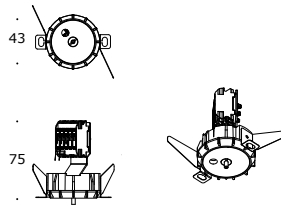


5X

00116

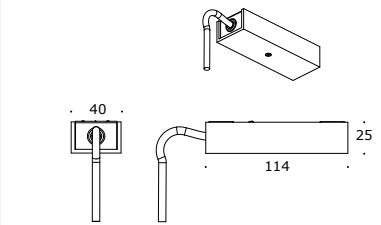


00010

Lelo Feed

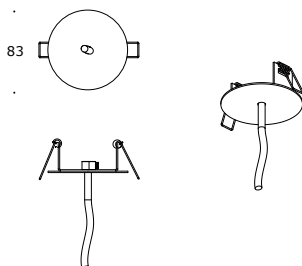


00051

Lelo Feed

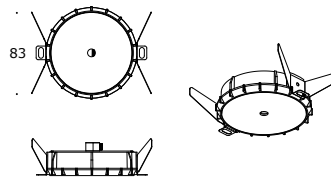

00050

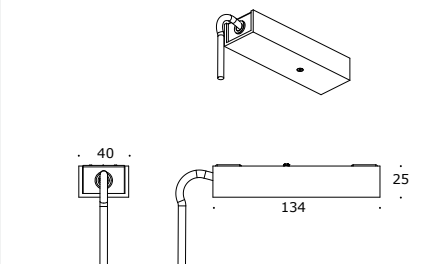

00110

CODES

LIGHT SOURCE

HW - 2700K

WW - 3000K

W - 4000K