

# LELO SURFACE



LELO is available in 3 sizes and can be surface suspended or wall/ceiling mounted. It consists of circular aluminium profile and an acrylic diffuser for uniform illumination. Integrated or remote control gear that can be fixed or touch/DALI dimmable. Can be ordered in DOWN or UP/DOWN versions in 900mm, 1200mm or 1500mm diameter.



## LELO SURFACE CEILING FIX

	900 mm	1200 mm	1500 mm
reference	42120HW/WW/W	42121HW/WW/W	42122HW/WW/W
wattage	58 W	70 W	92 W
voltage	24 V	24 V	24 V
K	2700/3000/4000 K	2700/3000/4000 K	2700/3000/4000 K
IP20	CE		
CRI	95+	95+	95+
Gear to be ordered separately.	3100	4200	5300

## LELO SURFACE ACCESSORIES



. 85 .

recessed power feed  
TRIMLESS

00050



. 85 .

recessed power feed

00051


Gear not included.

DEKKO

# POWER FEED

## FEED RECESSED

Strip | Stripmini | Stripminislim | Lelo | Shu




3X 5X

00014

00015

## FEED RECESSED TRIMLESS

Strip | Stripmini | Stripminislim | Lelo | Shu




5X

00115


## FEED EXTERNAL

Strip | Stripmini | Stripminislim | Lelo | Shu



00012

Strip | Stripmini | Stripminislim | Lelo | Shu




3X 5X

00016

00017


## FEED COMBI

Strip | Stripmini | Stripminislim | Lelo | Shu




5X

00116

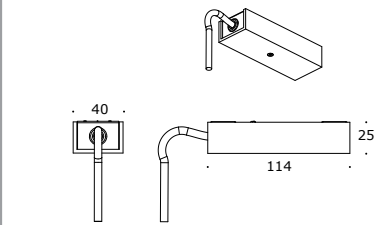


00010

Lelo Feed




00051

Lelo Feed



00050

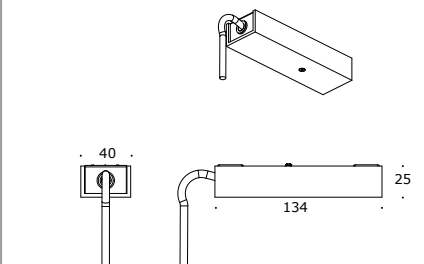

00110

# CODES

## LIGHT SOURCE

HW - 2700K

WW - 3000K

W - 4000K